


Take Your Gaming Further



## Game Drive PS5<sup>®</sup> NVMe<sup>™</sup> SSD

Take Your Gaming Further

A partnership between PS5<sup>®</sup> gameplay and SSD storage, the officially licensed Game Drive PS5<sup>®</sup> NVMe<sup>™</sup> SSD is the optimal drive for gamers. Built to thrive with both the Digital and Standard Editions of PS5<sup>®</sup>, this SSD features up to 7400/6900MB/s sequential read/write speeds, a custom heatsink, and instantly expands your capacity with up to 2TB of space. Plus, it installs with just a screwdriver.

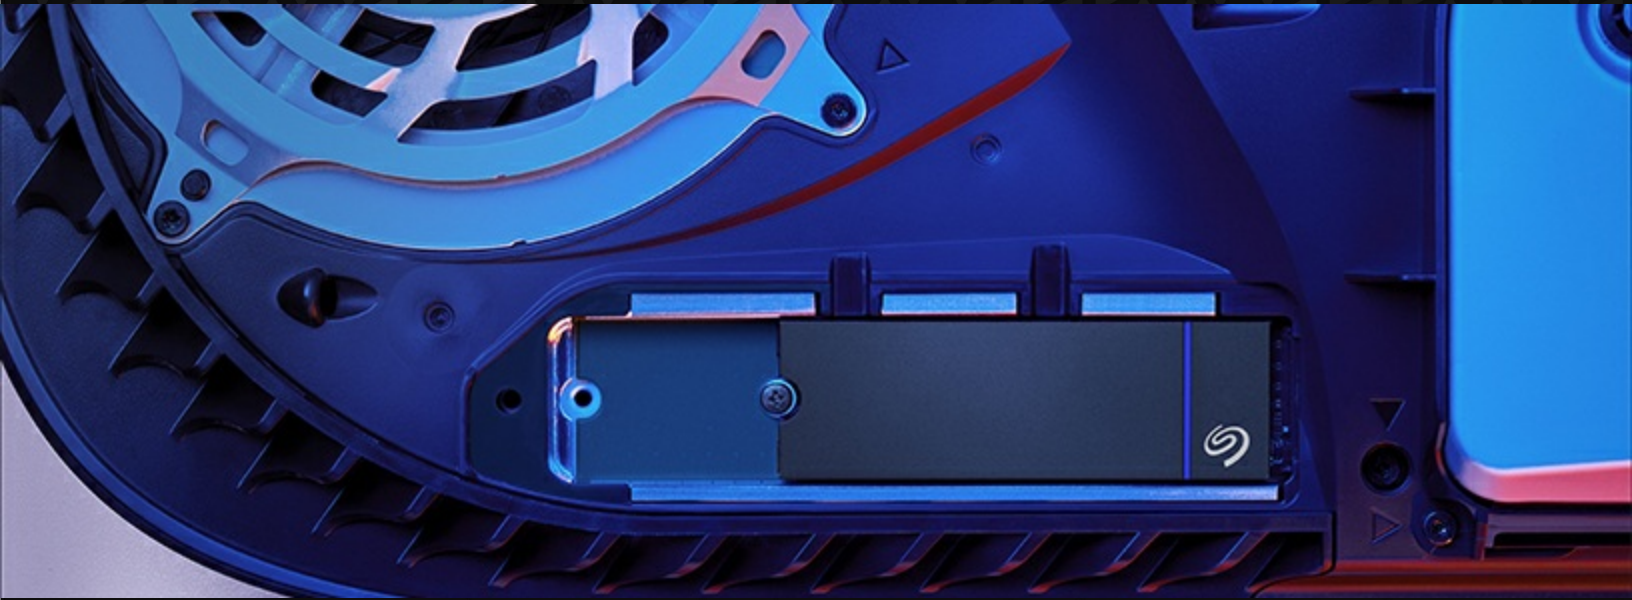

## Key Features

### Officially Licensed

Built with matching firmware to seamlessly work with all models of PS5<sup>®</sup>.

### Cool Speed Ahead

Custom heatsink helps minimize thermal throttling and maintain peak performance for longer periods of time.

### Download. Update. Play.

All your PS5<sup>®</sup> and PS4<sup>®</sup> games operate directly from the M.2 SSD.

# Take Your Gaming Further



GAME DRIVE PS5® NVMe™ SSD

## Absolute Performance

Up to 7400/6900MB/s read/write speeds harnesses the full power of PCIe Gen4.

## Build Your Game Vault

Up to 2TB of capacity means no more sacrificing, deleting, or redownloading games.

## Install with Ease

Simple drop-in installation for PS5®—all you need is a screwdriver.



| RETAIL PACKAGING | BOX DIMENSIONS | MASTER CARTON DIMENSIONS | PALLET DIMENSIONS |
|------------------|----------------|--------------------------|-------------------|
| Length (in/mm)   | 6.102in/155mm  | 11.496in/292mm           | 47.992in/1219mm   |
| Width (in/mm)    | 4.291in/109mm  | 6.024in/153mm            | 40in/1016mm       |
| Depth (in/mm)    | 0.945in/24mm   | 5.512in/140mm            | 44.134in/1121mm   |
| Weight (lb/kg)   | 0.24lb/0.109kg | 2.976lb/1.35kg           | 564.383lb/256kg   |

| QUANTITIES                |     |
|---------------------------|-----|
| Boxes per Master Carton   | 10  |
| Master Cartons per Pallet | 168 |
| Pallet Layers             | 7   |

| SYSTEM REQUIREMENTS   | WHAT'S INCLUDED   |
|---|---|
| <ul style="list-style-type: none"><li>M.2 (M key) slot, PCIe® G4 ×4 interface (backwards compatible with PCIe G3 interface)</li><li>PlayStation®5 consoles require system software version 21.02-04.00.00 or later.</li></ul> | <ul style="list-style-type: none"><li>Game Drive PS5® NVMe™ SSD</li><li>Quick Install Guide</li></ul> |

| REGION | ORDERING MODEL NUMBER | CAPACITY | LIMITED WARRANTY (YEARS) | UPC CODE     | EAN CODE      | MULTI-PACK UPC |
|--------|-----------------------|----------|--------------------------|--------------|---------------|----------------|
| AMER   | ZP1000GP3A1011        | 1000GB   | 5                        | 763649181133 | 8719706436144 | 10763649181130 |
| AMER   | ZP2000GP3A1001        | 2000GB   | 5                        | 763649173275 | 8719706430098 | 10763649173272 |
| EMEA   | ZP1000GP3A2001        | 1000GB   | 5                        | 763649173305 | 8719706430128 | 10763649173302 |
| EMEA   | ZP2000GP3A2001        | 2000GB   | 5                        | 763649173312 | 8719706430135 | 10763649173319 |
| APAC   | ZP1000GP3A3001        | 1000GB   | 5                        | 763649173343 | 8719706430166 | 10763649173340 |
| APAC   | ZP2000GP3A3001        | 2000GB   | 5                        | 763649173350 | 8719706430173 | 10763649173357 |

# Take Your Gaming Further

GAME DRIVE PS5® NVME™ SSD

| SPECIFICATIONS                                     | 2TB                                 | 1TB                                 |
|--|-------------------------------------|-------------------------------------|
| Capacity   | 2TB                                 | 1TB                                 |
| Standard Model                                     | ZP2000GP300001                      | ZP1000GP300001                      |
| Interface  | PCIe Gen4 x4 NVMe 1.4               | PCIe Gen4 x4 NVMe 1.4               |
| NAND Flash Memory                                  | 3D TLC                              | 3D TLC                              |
| Form Factor  | M.2 2280 with heatsink <sup>1</sup> | M.2 2280 with heatsink <sup>1</sup> |
| PERFORMANCE  |                                     |                                     |
| Sequential Read (Max, MB/s), 128KB <sup>2</sup>    | 7,400                               | 7,400                               |
| Sequential Write (Max, MB/s), 128KB <sup>2</sup>   | 6,900                               | 7,000                               |
| Random Read (Max, IOPS), 4KB QD32 T8 <sup>2</sup>  | 1,300,000                           | 1,300,000                           |
| Random Write (Max, IOPS), 4KB QD32 T8 <sup>2</sup> | 1,300,000                           | 1,300,000                           |
| ENDURANCE/RELIABILITY                              |                                     |                                     |
| Total Bytes Written (TB)                           | 2,400                               | 1,100                               |
| Mean Time Between Failures (MTBF, hours)           | 1,800,000                           | 1,800,000                           |
| Warranty, Limited (years)                          | 5                                   | 5                                   |
| POWER MANAGEMENT                                   |                                     |                                     |
| Active Power, Average (W)                          | 8.6                                 | 8.3                                 |
| Idle Power PS3, Average (mW)                       | 28                                  | 22                                  |
| Low Power L1.2 mode (mW)                           | <5                                  | <5                                  |
| ENVIRONMENTAL                                      |                                     |                                     |
| Temperature, Operating Internal (°C)               | 0°C – 70°C                          | 0°C – 70°C                          |
| Temperature, Nonoperating (°C)                     | -40°C – 85°C                        | -40°C – 85°C                        |
| Shock, Nonoperating: 0.5ms (Gs)                    | 1500Gs                              | 1500Gs                              |
| SPECIAL FEATURES                                   |                                     |                                     |
| TRIM   | Yes                                 | Yes                                 |
| S.M.A.R.T.   | Yes                                 | Yes                                 |
| Halogen Free                                       | Yes                                 | Yes                                 |
| RoHS Compliance                                    | Yes                                 | Yes                                 |
| PHYSICAL   |                                     |                                     |
| Length (mm/in, max)                                | 80.85mm/3.183in                     | 80.85mm/3.183in                     |
| Width (mm/in, max)                                 | 24.22mm/0.953in                     | 24.22mm/0.953in                     |
| Height (mm/in, max)                                | 11.10mm/0.437in                     | 11.10mm/0.437in                     |
| Weight (g/lb)                                      | 49g/0.108lb                         | 49g/0.108lb                         |

<sup>1</sup> Please verify that your system provides enough space for installation. Game Drive SSD with heatsink exceeds dimensions of a standard M.2 2280 form factor. Heatsink is pre-installed and should not be removed as it can damage the SSD.

<sup>2</sup> Fresh out of box (FOB) performance obtained on newly formatted drive. Performance may vary based on SSD's firmware version, system hardware, and configuration. Performance based on CrystalDiskMark v.7.0.0 x64 on Windows 10 host with PCIe Gen4 motherboard.

SEAGATE.COM

© 2024 Seagate Technology LLC. All rights reserved. Seagate, Seagate Technology, and the Spiral logo are registered trademarks of Seagate Technology LLC in the United States and/or other countries. PlayStation is a registered trademark of Sony Computer Entertainment Inc. PS4 and PS5 are trademarks of the same company. The NVMe word mark and/or NVMeExpress design mark are trademarks of NVMeExpress, Inc. The PCIe word mark and/or PCIeExpress design mark are registered trademarks and/or service marks of PCI-SIG. All other trademarks or registered trademarks are the property of their respective owners. When referring to drive capacity, one gigabyte, or GB, equals one billion bytes and one terabyte, or TB, equals one trillion bytes. Your computer's operating system may use a different standard of measurement and report a lower capacity. In addition, some of the listed capacity is used for formatting and other functions, and thus will not be available for data storage. Quantitative usage examples for various applications are for illustrative purposes. Actual quantities will vary based on various factors, including file size, file format, features, and application software. Actual data rates may vary depending on operating environment and other factors, such as chosen interface and drive capacity. Complying with all applicable copyright laws is the responsibility of the user. Seagate reserves the right to change, without notice, product offerings or specifications. SC12.2-2305US